


OPERATING INSTRUCTIONS FOR YOUR



VIPER[®]

AUTO SECURITY SYSTEM

MODEL **300+**

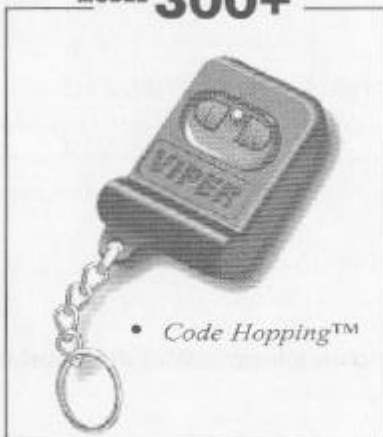

• *Code Hopping™*

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this device.

CONGRATULATIONS on your purchase of a state-of-the-art vehicle security system. This system has been designed to provide years of trouble-free operation. Due to the complexity of this system, it must be installed by an authorized dealer only. Installation of this product by any other person other than an authorized dealer voids the warranty. All dealers are provided with a preprinted dealer certificate to verify that they are authorized.

THE SYSTEM REQUIRES NO SPECIFIC MAINTENANCE. Your remote control is powered by a miniature 12V battery, type GP23A, that will last about a year under normal use. When the battery weakens, operating range will be reduced and the LED on the remote will light dim.

YOUR WARRANTY card must be returned and the bar code serial number must not be removed. If the warranty card is not returned you don't have a warranty. It is also necessary to keep your proof of purchase which reflects that the product was installed by an authorized dealer. **Make sure you receive the warranty card from your dealer.**

THIS OWNER'S GUIDE should help you to get the most out of your system. Please take the time to read it thoroughly, prior to using the system.


Table of Contents

System Maintenance	2	Valet® Mode	7
Your Warranty	2	Remote Valet®	7
What Is Included	3	Nuisance Prevention Circuitry™	7
Transmitter Channels	4	Diagnostics	8
Using your System	4	Arming Diagnostics	8
Arming	4	Disarming Diagnostics	8
Improved Arming While Driving	5	Table of Zones	9
Disarming	5	Code Hopping™ Explained	9
High Security Disarm	6	Programming Options	10
Disarming Without A Transmitter	6	Glossary Of Terms	11
Stall Mode™	6	Security & Convenience Expansions	12
Panic Mode	6		

What is included

- The control module
- A pair of two-button transmitters
- A Stinger™ DoubleGuard® dual-output shock sensor (on board the control unit)
- The Revenger™ Soft Chirp™ six-tone programmable siren
- The red Status LED indicator light
- A push-button Valet® switch
- Your warranty card
- FailSafe® starter kill (Ready feature, may require additional labor).

Transmitter Channels

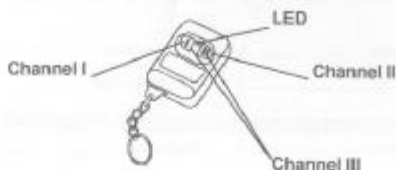

Channel I

The arm/disarm and panic functions, are usually controlled by button I.

Channel II

The Silent Mode™/trunk release function, is usually controlled by button II. Silent Mode™ and Remote Valet™ work by pressing button II for less than one second. Trunk release requires you to press button II for 1.5 seconds.

Channel III (for options)

Usually controlled by pressing buttons I and II at the same time.

These assignments can be changed if needed, such as for two-car operation from one remote.

Using Your System

Arming

You can turn on, or **arm**, the system by pressing button I of your transmitter for one second. When the system arms, you will hear a short siren sound, or **chirp**, and see the parking lights flash once. If the vehicle's power door locks are controlled by the system, the doors will lock.

While the system is armed, the Status LED will flash about twice a second, showing that the system is actively protecting your vehicle.

If you hear a second chirp after arming and see the Status LED flashes in groups, see *Diagnostics* section. This extra chirp is called **Bypass Notification**.

The system also can be programmed to arm itself automatically (called **passive arming**). If the system is programmed for passive arming, it will automatically arm 30 seconds after the ignition is turned off and the system

"sees" you leave the vehicle by opening and closing a door. Whenever the system is in its 30-second passive arming countdown, the Status LED will flash twice as fast as it does when the system is armed.

NOTE: If any protected entry point (such as a door or a switch-protected trunk or hood) is open, the system will not passively arm (unless forced passive arming is programmed on. See *Programming Options* section). Additionally, each time a sensor is triggered during the arming countdown, the 30-second countdown starts over.

When armed, your vehicle is protected in the following ways:

- Light impacts will trigger the **Warn Away®** signal. When triggered, the siren will chirp and the parking lights will flash for a few seconds.
- Heavy impacts will trigger the system. The **trigger sequence** is 30 seconds of constant siren and flashing parking lights.
- If a door is opened, the system will immediately start chirping the siren and flashing the parking lights. Three seconds later, the siren output changes to a continuous blast. This **progressive** response gives you time to disarm the system with your transmitter if you inadvertently open the door while the system is armed, while still providing instant response (even if the door is immediately closed).
- Turning on the ignition key will trip the same two-stage response as opening a door.
- The optional **starter kill** prevents the vehicle's starter from cranking.

Arming While Driving

Your system can be armed while driving the vehicle! Simply press button I on your transmitter for 1.5 seconds while the vehicle is running, or the ignition is on. The system will chirp once and then once more to indicate that the ignition is on. The system will not respond to any input except the door triggers and the starter kill relay (if installed) will not be activated. The system will disarm automatically when the ignition is turned off. The siren will chirp twice and the LED will stop flashing.

Disarming

To turn off, or **disarm** the system, press button I again. You will hear two chirps, and the parking lights will flash twice. If power locks are controlled by the system, the doors will unlock. If the siren chirps either four or five times when disarming, see *Diagnostics* section. This is called **Tamper Alert**.

High Security Disarm

Your system includes a High Security Disarm feature. During the trigger sequence, using the transmitter to disarm the system will only stop the trigger sequence (the siren will stop and the parking lights will stop flashing). However, the system will remain armed and the doors will stay locked. This is extremely useful if you must stop the system from sounding, but are unable to check the vehicle visually. The trigger will stop, but the vehicle will remain protected.

To disarm with the transmitter during a trigger, press button I on your transmitter. The siren will stop sounding. Next press button I once more and the system will chirp four or five times (reporting the trigger) and disarm.

Disarming Without a Transmitter

This feature allows you to disarm the system without the transmitter should it be lost, damaged or disabled. In order to disarm without a transmitter, you must have the vehicle's ignition key and know where the valet button is. Be sure to check with the installer for the location of the Valet button.

Turn on the ignition.



Push the Valet switch within 15 seconds.



The system should now disarm. If it does not, you may have waited too long, so turn the ignition off and on and try again.

Silent Mode™

To temporarily turn off the arm or disarm chirps, use **Silent Mode™**. Simply press button II briefly before arming or disarming, and the confirmation chirp(s) will be eliminated for that one operation only. If you want the arm/disarm chirps turned off permanently, your dealer can do this for you.

NOTE: The Warn Away® response to lighter impacts is bypassed if the system is armed using Silent Mode™. This ensures that no chirps will be emitted by the siren in an area you want chirp free. The system is still fully able to trigger. Only the Warn Away® response is defeated.

Panic Mode

If you are threatened in or near your vehicle, you can attract attention by triggering the system with your transmitter! Just press button I for 1.5 seconds, and you will enter **Panic Mode**. The siren will sound and the parking lights will flash for 30 seconds. To stop Panic Mode at any time, press button I on the transmitter again.

Valet® Mode

You can prevent your system from automatically arming and triggering by using Valet® Mode. This is very useful when washing the vehicle or having it serviced. In Valet® Mode, the system will not arm, even with the transmitter, but all convenience functions (door locks, trunk release, etc.) will work normally.

To enter or exit Valet® Mode with the Valet® switch:

Turn ignition to "run" position, then turn to "off" position.



Press and release the Valet® switch within 10 seconds.



The Status LED will light steady if you have entered Valet® Mode, and it will go out if you exited Valet® Mode.

Using Remote Valet® as you enter or exit the vehicle:

Open any door.

Press button I (or the arm/disarm button).



Press button II (or the channel 2 button).



Press button I again.



The Status LED will light steady if you have entered Valet® Mode, and it will go out if you exited Valet® Mode.

Nuisance Prevention Circuitry™

Your system has DEI's Nuisance Prevention Circuitry® (NPC®). It prevents annoying repetitive trigger sequences due to faulty door pin switches or environmental conditions such as thunder, jackhammers, airport noise, etc.

Here's how it works:

Let's say the alarm triggers *three times*. Each time, the same sensor or switch is triggering the alarm. The three triggers are within 60 minutes of each other. NPC™ will interpret this pattern of triggers as false alarms. After the third trigger, NPC® ignores, or bypasses, that sensor or switch (along with any other sensors or switches sharing the same zone).

If the bypassed sensor tries to trigger the system while it is being bypassed, the 90-minute bypass period will start over. This ensures that a sensor that continuously triggers will remain bypassed.

Doors are covered by NPC® differently: If the alarm is triggered by an open door for three full cycles (one and one half minutes), the doors will be bypassed until the trigger ceases.

NOTE: Arming and disarming the system does not reset this function! The only ways to reset a bypassed zone are for it to not trigger for 60 minutes, or to turn on the ignition. If testing your system, it is important to remember that the NPC® programming can cause zones to be bypassed and seem to stop working. If five chirps are heard when disarming, NPC® has been engaged. If you wish to clear the NPC® memory, turn the ignition on.

Diagnostics

The microprocessor at the heart of your system is constantly monitoring all of the switches and sensors connected to it. It detects any faulty switches and sensors and prevents them from disabling the entire system. The microprocessor will also record and report any triggers that occurred during your absence.

Arming Diagnostics

If the system is armed with an input active (door open, sensor triggering, etc.) the unit will chirp once when arming and then one more time a few seconds later. This is called **Bypass Notification**.

Note: Bypass notification will not occur when using Silent Mode™ or if chirps have been programmed OFF.

The system will ignore the input that was active when it was armed until it goes away. Three seconds later it will monitor that input normally. For example, if your car has interior light exit delay, and you arm the system before the interior light goes out, you may get Bypass Notification. Three seconds after the light goes out, however, the doors are monitored normally.

Disarming Diagnostics

Extra disarm chirps are the **Tamper Alert**. If four chirps are heard when disarming, the system was triggered in your absence. If five chirps are heard, a zone was triggered so many times that Nuisance Prevention Circuitry® has bypassed that zone. In either case, the Status LED will indicate which zone was

involved (see *Table of Zones* section). The system will retain this information in its memory, and chirp four or five times each time it is disarmed, until the next time the ignition key is turned on.

Table of Zones

The **zone number** is the number of LED flashes used by the system to identify that input. The standard input assignments are listed below, along with spaces to write in any optional sensors or switches you have had installed.

ZONE (# of LED FLASHES)	DESCRIPTION	DEALER INSTALLED OPTIONS
2	A heavier impact trigger of the shock sensor	
3	Door switch circuit	
4	Instant trigger of optional sensors	
5	Ignition	

If the Warn Away® response is triggered, the LED will not report it.

Code Hopping™ EXPLAINED

The receiver and transmitters each use a mathematical formula called an algorithm to change their code each time the transmitter is used. This technology has been developed to increase the security of the unit. The control unit knows what the next codes should be. This helps to keep the transmitter "in synch" with the control unit even if you use the remote control out of range of the vehicle. However, if the transmitter has been pressed many times out of range of the vehicle, or the battery has been removed, it may get out of synch with the control unit and fail to operate the system. To re-synch the remote control simply press the arm/disarm button of the remote control several times within range of the vehicle. The alarm will automatically re-synch and respond to the transmitters normally.

Programming Options

Programming options control what your system does during normal operation, and require little or no additional parts. However, some may require additional installation labor. The factory settings are in **bold**.

- **Active** arming (only with the transmitter) or passive arming (automatic arming 30 seconds after the last door is closed).
- Arming/disarming confirmation chirps **on** or off.
- Passive door locking (with passive arming) or **active** door locking (only when arming with the transmitter). This feature only works if passive arming has been selected for step one.
- The ignition-switch-controlled door-locking feature **on** or off. With this feature on, the doors will lock 3 seconds after the key is turned on, and unlock when the key is turned off. **Note:** If the door is open when the ignition is turned on, the doors will not lock.
- Panic mode **enabled**/disabled with the ignition on. (Some states have laws against siren capability in a moving vehicle).
- Automatic Engine Disable (AED) **on** or off. This feature deters theft of the vehicle, whether or not the alarm is armed. If AED is programmed on, the starter of the vehicle will be disabled 30 seconds after the ignition is turned off. The LED will flash slowly (one-half its normal armed rate) to indicate the AED arming cycle. 30 seconds later, the starter of the vehicle will be disabled. To start the car, you will need to arm the car with the remote and then disarm it with the remote. You can also disarm the AED feature by turning the ignition on and pressing the valet button once. AED is also disabled when in valet mode. **NOTE:** This feature will only function if the FailSafe starter kill relay has been installed.
- Forced passive arming **on** or off. If your system is programmed to passively arm and this feature has been programmed on, the system will passively arm after one hour, even if a protected entry has been left open. If a door has accidentally been left ajar when leaving the vehicle, forced passive arming ensures that the system will arm in one hour. **NOTE:** When forced passive arming occurs, the entry point that has been left open, and anything connected to the same zone, is bypassed and cannot trigger the system. The remaining inputs to the system are fully operational.
- Siren tones and chirp volume. The output of the Revenger™ Soft-Chirp™ siren consists of six different tones in sequence. Any of these tones can be eliminated by your dealer, resulting in a unique, easily identifiable siren sound. The siren chirps can be either full volume or **5 decibels quieter** than the full alarm blast.

Glossary of Terms

Control Unit The "brain" of your system. Usually hidden underneath the dash area of the vehicle. It houses the microprocessor which monitors your vehicle and controls all of the alarm's functions.

FailSafe® Starter Kill An automatic switch controlled by the security system which prevents the vehicle's starter from cranking whenever the system is armed. The vehicle is never prevented from cranking when the system is disarmed, in valet mode, or should the starter kill switch itself fail. Your system is ready for this feature, however installation of this feature may require additional labor.

Input A physical connection to the system. An input can be provided by a sensor, pinswitch or to existing systems in the vehicle, such as ignition or courtesy lights.

LED Red light mounted somewhere in the vehicle. It is used to indicate the status of your system. It is also used to report triggers and faults in the system or sensors.

Shock Sensor This system is packaged with a Stinger® DoubleGuard® shock sensor. This sensor is mounted in the vehicle and designed to pick up impacts to the vehicle or glass.

Siren Noise generating device usually installed in the engine compartment of the vehicle. It is responsible for generating the "chirps" you hear, as well as the six tones you hear while the alarm is triggered.

Transmitter Hand-held, remote control which operates the various functions of your system.

Trigger or triggered sequence This is what happens when the alarm "goes off" or "trips." The triggered sequence of your system consists of 30 seconds of siren sounding and parking light flashing.

Valet® Switch A small push button switch mounted somewhere inside the vehicle. It is used to override the alarm when a transmitter is lost or damaged, or to put it into Valet® mode.

Warn Away® response Lighter impacts to the vehicle will generate the Warn Away® response. It consists of several seconds of siren chirps and parking light flashes.

Zone A zone is a separate input that the alarm can recognize as unique. Each input to the system is connected to a particular zone. Often two or more inputs may share the same zone.

Security & Convenience Expansions

Here we have listed only some of the many expansion options available. Please consult your dealer for a complete explanation of all the options available to you.

Field Disturbance Sensor: An invisible dome of coverage is established by the 508T "radar" sensor. Your system can react to any intrusions into this field with the triggered sequence.

Backup Battery: The 520T keeps the system armed, triggers the alarm and keeps the starter kill active if main battery power is disconnected.

Electronic Hood Lock: This prevents the vehicle's hood from being opened whenever the system is in alarm mode, keeping thieves away from the system's siren, the battery connections, or other components under the hood.

Audio Sensor: Metal on glass, glass cracking, or breaking glass produce distinctive acoustic signatures. The 506T and audio sensor uses a microphone to pick up sounds, and then analyze them with proprietary acoustic software to determine if the glass has been struck.

Power Trunk Release: The channel 2 output of the system can operate a factory power release for the vehicle's trunk or hatch. (An optional relay may be required.) If the factory release is not power activated, the DEI's 522T trunk release solenoid can often be added.

Power Locks: This system offers lock outputs that can control some manufacturers' power door lock systems. For other systems, additional parts may be required.

Valet® Start System: For the ultimate in convenience, the Valet® start system can start your vehicle, monitor engine functions, and power your climate control system with a push of a button! Over-rev protection, open-hood lockout, brake pedal shutoff, and automatic timer shutoff are all included. (Only for automatic transmission, fuel-injected gasoline vehicles).

Power Window Control: Automatic power window control is provided with the 529T or 530T systems. These can operate power windows, and can roll them up automatically when the system is armed, down when you transmit channel 2 or 3, or both up and down. The 530T also provides one touch switch operation.